

LWAE-550 Series

Product Characteristic


- Material: Sheet steel
- Type of protection: IP54
- Insulation class: F
- Approvals: CCC CE
- Motor type: BLEC motor
- Perm. amb.temp.: -25 C ~ +60 C
- Techniacal Feature: Control input 0-10VDC/PWM, Tech output, Locked-Rotor protection, Reverse Polarity Over-voltage protection Soft Start Protection.



Technical Specifications

Model	Voltage	Frequency	Current	Power	Speed	Air Volume	Static Pressure	Noise	Curve
	V	Hz	A	W	RPM	m³/h	Pa	dB(A)	
LWAE3G550TS-5MNW-01	3-380	50/60	1.65	950	1690	11800	260	78	①
LWAE3G550TT-5MNW-02	3-380	50/60	1.65	950	1690	11800	260	78	
LWAE3G550TS-5MEW-03	3-380	50/60	1.65	950	1690	11800	260	78	
LWAE3G550TT-5MEW-04	3-380	50/60	1.65	950	1690	11800	260	78	
LWAE3G550TS-5MGW-05	3-380	50/60	1.65	950	1690	11800	260	78	
LWAE3G550TT-5MGW-06	3-380	50/60	1.65	950	1690	11800	260	78	


Flow Rate Curve

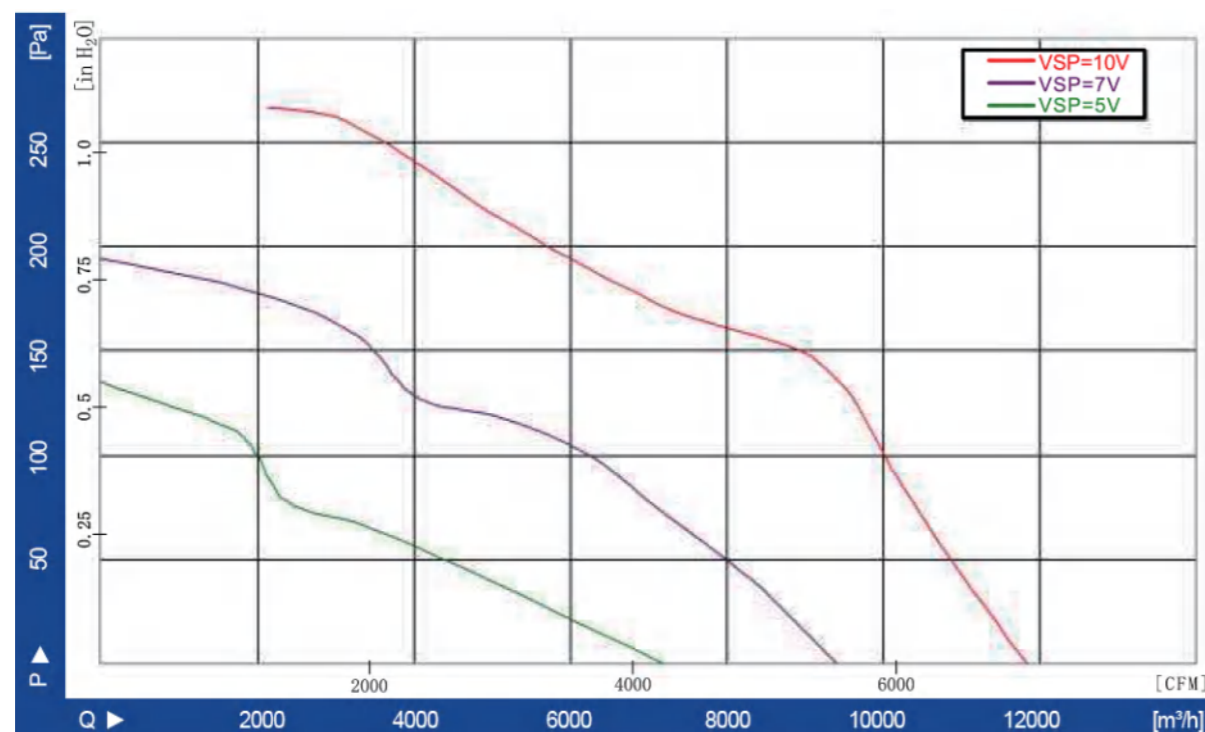

Product Drawing


LWAE3G550TS-5MNW-01(Suction)

LWAE3G550TT-5MNW-02(Blowing)

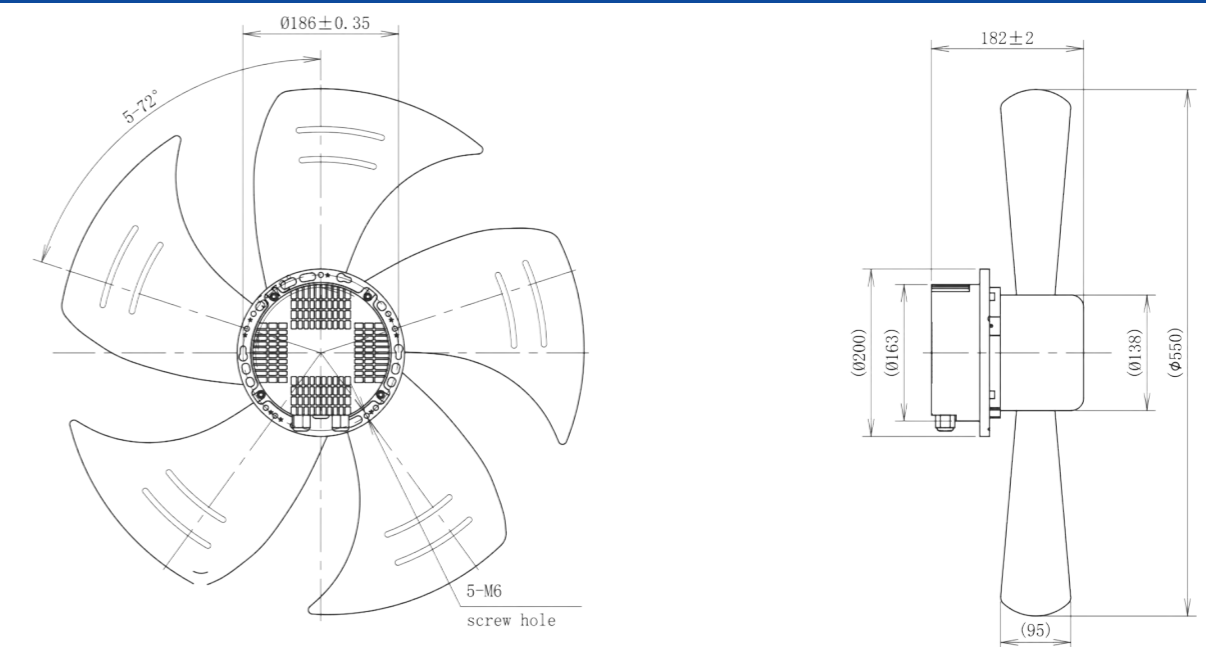

LWAE3G550TS-5MEW-03(Suction)

LWAE3G550TT-5MEW-04(Blowing)

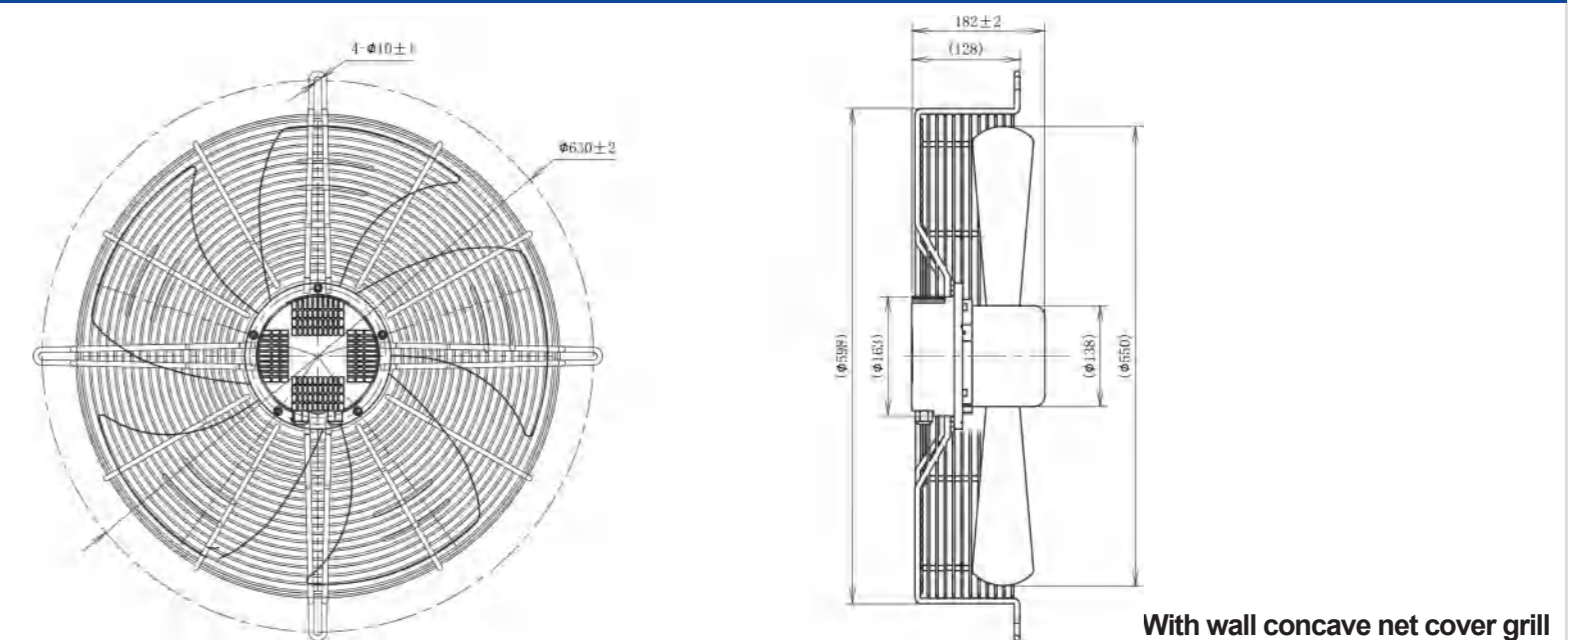

LWAE3G550TS-5MGW-05(Suction)

LWAE3G550TT-5MGW-06(Blowing)

