

LWAA-250 Series

Product Characteristic


- Blades : Cold rolled steel
- Number of blades: 5/7
- Mode of operation: S1
- Type of protection: IP44
- Insulation class: F
- Operation Temperature: -30~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2E250S-5MEB-01	220/230	50	0.5	110	2500	1648	3	65	①
LWAA2E250S-5MEB-02	220/230	60	0.65	130	2600	1854	3	67	②
LWAA2D250S-5MEB-03	380/400	50	0.18	100	2500	1648	/	65	①
LWAA2D250S-5MEB-04	380/400	60	0.22	130	2600	1854	/	67	②
LWAA4E250S-7MEB-05	220/230	50	0.25	50	1400	979	2	53	③
LWAA4E250S-7MEB-06	220/230	60	0.27	60	1650	1133	2	54	④
LWAA4D250S-7MEB-07	380/400	50	0.18	50	1400	979	/	53	③
LWAA4D250S-7MEB-08	380/400	60	0.15	45	1650	1133	/	54	④

Product Drawing (mm)

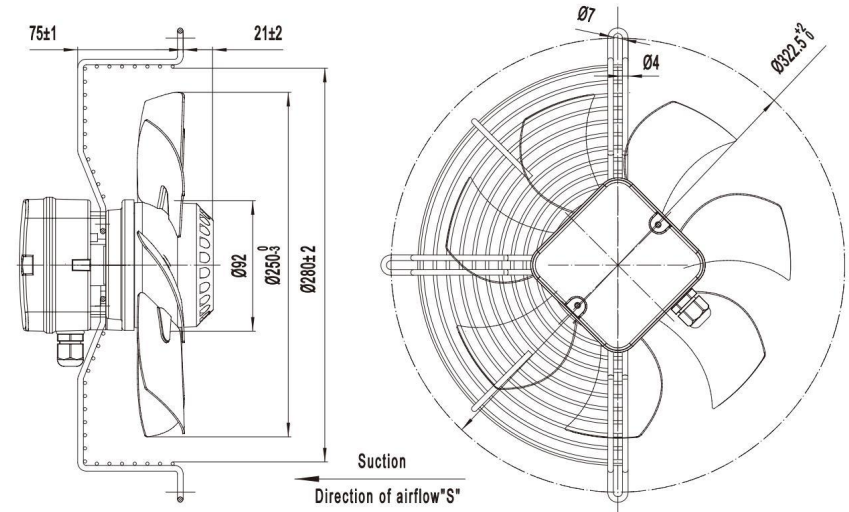

Flow Rate Curve

