

LWAA-450 Series

Product Characteristic


- Blades : Cold rolled steel
- Number of blades: 5
- Mode of operation: S1
- Type of protection: IP54
- Insulation class: F
- Operation Temperature: -30~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MEB-01	220/230	50	1.1	250	1350	4635	7	62	①
LWAA4E450S-5MEB-02	220/230	60	1.2	280	1600	4944	7	64	②
LWAA4D450S-5MEB-03	380/400	50	0.5	250	1350	4635	/	62	①
LWAA4D450S-5MEB-04	380/400	60	0.6	280	1600	4944	/	64	②
LWAA6E450S-5MEB-05	220/230	50	0.65	135	920	2987	6	56	③
LWAA6E450S-5MEB-06	220/230	60	0.75	170	1100	3502	6	58	④
LWAA6D450S-5MEB-07	380/400	50	0.31	135	910	2987	/	56	③
LWAA6D450S-5MEB-08	380/400	60	0.34	140	1030	3502	/	58	④

Product Drawing (mm)

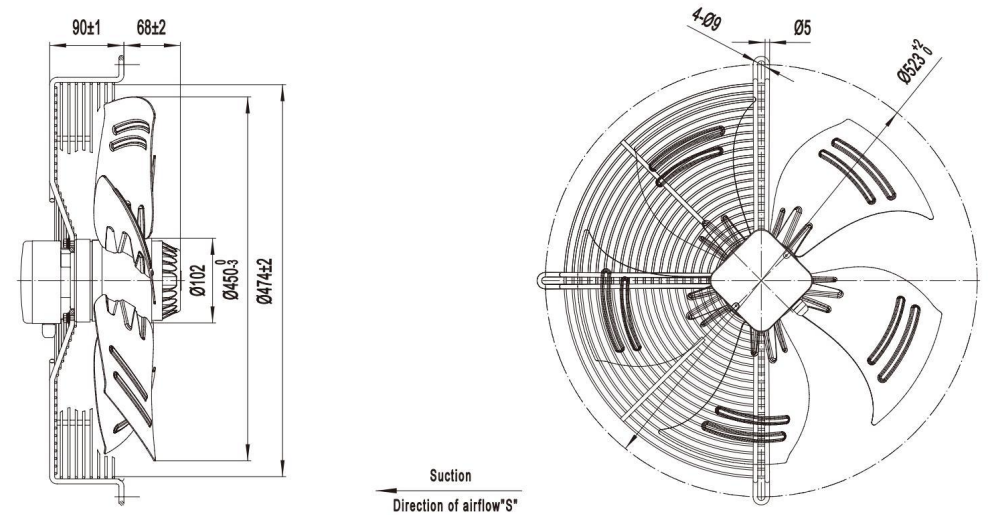

Flow Rate Curve

